

# Kaupin kesäkia



<b>Oil Pattern Distance:</b>	<b>40 Feet</b>	<b>Reverse Brush Drop:</b>	<b>35 Feet</b>	<b>Oil Per Board:</b>	<b>40 uL</b>
<b>Forward Oil Total:</b>	<b>13.04 mL</b>	<b>Reverse Oil Total:</b>	<b>6.72 mL</b>	<b>Volume Oil Total:</b>	<b>19.76 mL</b>
<b>Forward Boards Crossed:</b>	<b>326 Boards</b>	<b>Reverse Boards Crossed:</b>	<b>168 Boards</b>	<b>Total Boards Crossed:</b>	<b>494 Boards</b>

	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	4	18	148	0.0	7.6	7.6	5920
2	2L	8R	1	18	31	7.6	10.1	2.5	1240
3	9L	9R	2	18	46	10.1	15.2	5.1	1840
4	10L	10R	3	18	63	15.2	22.8	7.6	2520
5	11L	11R	2	22	38	22.8	29.0	6.2	1520
6	2L	2R	0	22	0	29.0	40.0	11.0	0

Navigation: Forward Reverse More


	Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1	2L	2R	0	26	0	40.0	28.0	-12.0	0
2	11L	11R	3	18	57	28.0	20.4	-7.6	2280
3	10L	10R	3	18	63	20.4	12.8	-7.6	2520
4	9L	9R	1	18	23	12.8	10.3	-2.5	920
5	8L	8R	1	18	25	10.3	7.8	-2.5	1000
6	2L	2R	0	14	0	7.8	0.0	-7.8	0

Navigation: Forward Reverse More

Conditioner:  
Type In or Select One

TransferType:  
Type In or Select One

- Forward
- Reverse
- Combined
- Buff

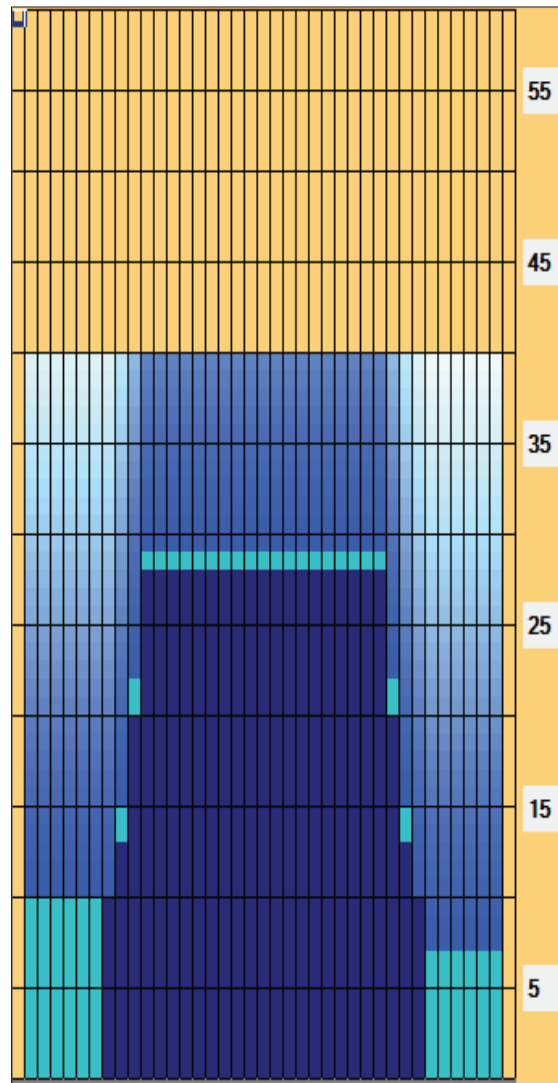

Program #2 is a HEAVY OIL PATTERN. Use a pattern like this when conditioning an excessively "HOOKING" surface. This will distribute a lot of HEAD OIL for problem heads, film overlays, and rough synthetics. Bowlers must be able to handle a lot of oil when playing on this condition.

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside Track:Middle	Middle Track:Middle	Inside Track:Middle	Middle: Inside Track	Middle:Middle Track	Middle:Outside Track
Track Zone Ratio	4	143	1	1	143	5

